




LONDON INTERIOR BLINDS

SHUTTERS | CURTAINS | AWNINGS

AWNING PRICE LIST & PRODUCT GUIDE 2023

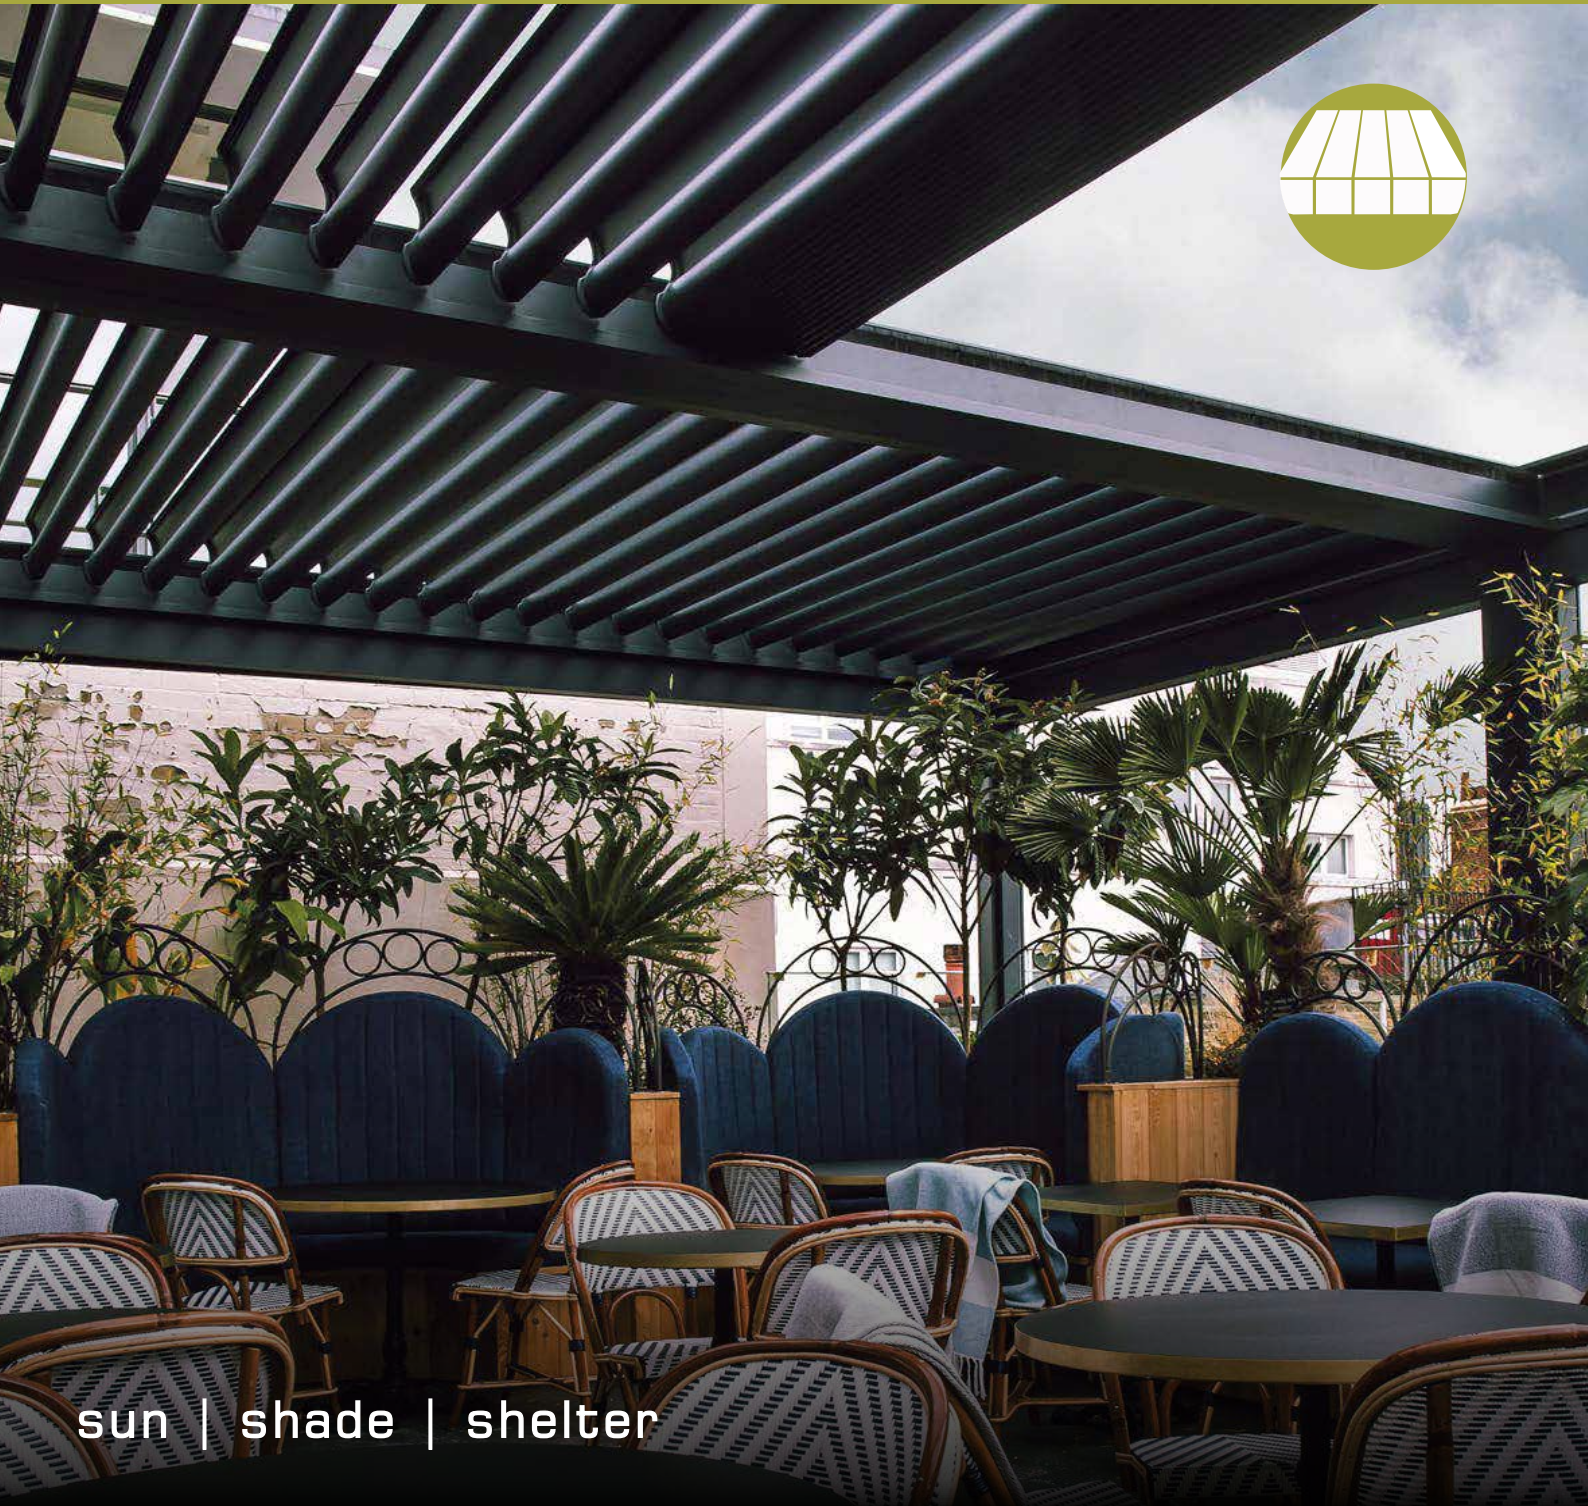

sun | shade | shelter

LUXURY UK MANUFACTURED EXTERNAL SHADING SINCE 1987

07595 411700

sales@londoninteriorblinds.co.uk

www.londoninteriorblinds.co.uk

Dedicated to external shading for over 30 years, we work with leading European partners to design and develop the very finest external shading systems, that deliver genuine lifestyle enhancing and energy saving benefits, combining streamline looks and cutting edge design, with strength and durability to ensure they stand the test of time.

MADE IN BRITAIN

Proudly manufactured right here in the UK by our team of highly skilled technicians and state of the art machinery, at our modern production facility in Sudbury, Suffolk, our stylish patio awnings, innovative external blinds and award winning louvered roofs are the very pinnacle of precision, offering a superior specification to all others on the market. All our products come set up for an effortless, hassle free installation and are rigorously tested to meet or exceed stringent quality & safety standards, backed with an industry leading guarantee, upto 5 years, for peace of mind.

Deliveries are made on our own fleet of vehicles across mainland England and Wales, to your premises or direct to site, ensuring our products arrive on time, in perfect condition and our dedicated trade team offer unparalleled sales, marketing and technical support. Furthermore our installer training academy gives real hands on experience on how to correctly survey, install and commission our systems, giving total confidence.

All our products can be viewed at our outdoor living showsite and shading experience centre in Suffolk, where you will be able to see first hand the unique features and finishing touches that set our products apart.

MOTORISATION

Page 03

ANQUILLA

Page 09

TORTOLA

Page 10

CUBA

Page 11

INTRODUCING io-homecontrol®

somfy®

The next generation of motors, controls and sensors, exclusively featured on all patio awnings and external blinds from Caribbean Blinds - a UK first!



TWO WAY

A communicative installation: io-homecontrol® makes it possible to exchange information between control units, automated systems and motors, enabling feedback in real time, thus making installation, use and maintenance easier.

MULTI-FREQUENCIES

More reliable transmission: io-homecontrol® scans three radio frequencies between 868 and 870 MHz and automatically chooses the best one to transmit the command.

ENCRYPTED

Dialogue is 100% secure: The tamperproof 128-bit encryption key will thwart any hacking attempt. This encryption key is exclusive to each installation and provides the same level as an online bank transaction.

RANGE

Guaranteed coverage: The frequency used (868 MHz) produces excellent results in terms of signal propagation and guarantees coverage within a radius of at least 20m in a concrete building. Out in the open this range increases to at least 200m.



SITUO 5 VAR A/M
All in one handset

- 4+1 channels (individual & group control)
- Auto/Manual function (switch sun sensor on/off)
 - Scroll wheel (dim lighting)
- My favourite position (intermediate point)
- Complete with wall bracket (use as a wall switch)

(fitted with 1 x CR2430 battery)



EOLIS 3D WIREFREE IO
Vibration sensor for patio awnings
(fitted with 2 x AAA batteries)



EOLIS WIREFREE IO
Wind sensor for external blinds
(fitted with 2 x AA batteries)



SUNIS WIREFREE II IO
Sun sensor for patio awnings & external blinds
(fitted with 2 x AA batteries)



THERMIS WIREFREE IO
Temperature sensor for patio awnings & external blinds
(fitted with 2 x AA batteries)
Thermis io is only available in conjunction with Tahoma (required to set up and adjust settings).



Tahoma®

Do more with io when connected to Tahoma®

Tahoma® is a smart hub that connects to the home broadband, allowing control of external shading system(s) from anywhere with wifi via the Tahoma app on a smartphone, tablet or computer.

- **Enjoy real time control:** set exactly the position the external shading system is needed and it will go to the desired point.
- **Create different scenarios:** enable simultaneous control of a group of external shading systems, to go to pre-determined positions.
- **Set an agenda:** ensure external shading systems go to pre-set positions created in scenarios automatically at the required times of the day.


RTS motors are also compatible with Tahoma but you do not benefit from 2-way control and communication.

PREMIUM QUALITY HIGH-TEX FABRICS

The most technically advanced and luxurious fabrics, exclusively featured on all patio awnings and external blinds from London Interior Blinds.



HIGHEST FADE RESISTANCE
Solution dyed fibres resist fading and do not break down even after years of exposure to the sun.



EXTRAORDINARY COLOUR LUMINOSITY
Colours that shine and come alive when backlit with the sun thanks to the combination of the CBA (Clean Brilliant Acrylic) fibre.



GREATEST WATER COLUMN
The tightest woven fibres, provide a water column of min. 450 mm to ensure a water repellent fabric.



SELF CLEANING
The smooth, dense fabric surface, coupled with unique TEXgard coating impregnated into each fibre, prevents dirt and water clinging to the fabric



OUTSTANDING DIMENSIONAL STABILITY
Fabric that holds and keeps its shape when under tension for a crisp, taut material surface to ensure it keeps a clean visual appearance.



OPTIMUM UV PROTECTION
Certified to stringent UV 801 standards, fabrics block up to 99% of ultraviolet rays increasing the protection time of skin to sunlight by a minimum of 40x.

SOLUTION DYED SATTLER ACRYLIC
Colour pigments are infused all the way to the core of the fibre ensuring the colours stay true


YARN DYED FIBRES FROM OTHER BRANDS
Pigments penetrate just the outer surface of the fabric, therefore these fabrics will fade over time



quality woven into every fibre

PATIO AWNINGS

Our premium UK manufactured patio awnings feature superstrong alu frameworks, next generation motors & controls and exclusive CBA fabrics that upto 50% less dirt adheres.

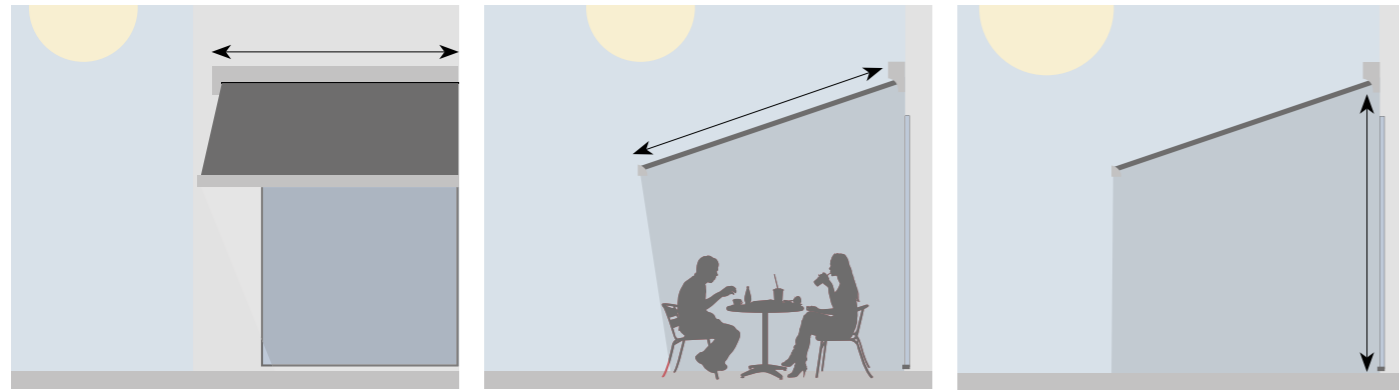

WIDTH

The width of a patio awning is the measurement from outside to outside of cassette casing.

It is recommended to overhang the door or window the awning is going over by a minimum 0.5m (50cm) each side to offer adequate shade, as the sun moves around the awning / property.

PROJECTION

The projection of a patio awning is the size (depth) of the folding arms. It is recommended to select a minimum projection of 2.5m - 3m to provide good coverage to a terrace. Smaller projections are suitable where primarily internal shade only is required.

MOUNTING HEIGHT




The mounting height of a patio awning is the distance from the ground to underside of cassette on the facade. It is recommended to install a patio awning based on the below calculation to ensure it has the required 14 degree pitch (factory set) for rain shower water run off.

Formula: Leadrail (front profile) walk under height (normally 2m) + (25cm per metre projection) = mounting height

Example: 3m projection awning with 2m leadrail height 2m (leadrail) + (25cm x 3) = 2.75m mounting height



Patio Awnings Range Overview (folding arm models)

Model	Description	Casing	Fixing Points	Width from - to	Projection fixed arm sizes	Fabric	Operation
 Anguilla	Budget friendly awning for residential applications	Full Cassette 152mm high x 223mm deep	End Fix bracket at each end of awning	1.78m - 4.00m	- 1.50m - 2.00m - 2.50m	World of Sattler - 3D Surface - Landscape - Urban - Solids	Somfy IO Motorised Remote Control manual operation via gear box & crank handle is available
 Tortolla	The UK's most popular awning for residential application	Full Cassette 152mm high x 223mm deep	End Fix bracket at each end of awning	1.78m - 5.00m	- 1.50m - 2.00m - 2.50m - 3.00m	World of Sattler - 3D Surface - Landscape - Urban - Solids	Somfy IO Motorised Remote Control manual operation via gear box & crank handle is available
 Cuba	The ultimate awning for residential & commercial applications	Full Cassette 220mm high x 147mm deep	Multi Fix brackets across width of awning	2.05m - 7.0m (single unit) 14.0m (coupled unit)	- 1.50m - 2.00m - 2.50m - 3.00m - 3.50m - 3.75m	World of Sattler - 3D Surface - Landscape - Urban - Solids	Somfy IO Motorised Remote Control

IMPORTANT FABRIC INFORMATION

Despite the most advanced manufacturing techniques, rippling and puckering of the material will occur around the seams (where the fabric is joined - vertical joins every 1.2m) and at the edges (hems) due to the double thickness of material on these parts 'v' the single thickness of the main panel of fabric. This is a natural characteristic that cannot be avoided, however it will not affect the function or performance of our patio awnings. For further information including visuals please get in touch

Hardware	Pitch angle	Fabric Width	Arms	Brackets	Wind Class EN13561	Lighting	Heating	Sensors
- Anthracite Grey RAL 7016 matt textured - White RAL 9016 semi gloss any other RAL colour is available (surcharge + extended lead time)	0 - 45 degrees 0cm - 75cm fall per metre	- 230mm (motorised) - 210mm (manual) less than awning width	66mm Twin Cable pressure die cast joints - upto 4.0m wide = 2	Face Fix 100mm wide - upto 4.0m wide = 2	Class 2 Beaufort 5 Fresh breeze, small trees begin to sway	3,500k warm white LED light strip mounted on wall beneath Anguilla / Tortolla mounted to underside Cuba	Aruba infra-red 1.5kw ultralow glare unit heat output 4m x 3m mounted on wall beneath awning	Eolis 3D Wirefree Wind io Sunis Wirefree II Sun io
- Anthracite Grey RAL 7016 matt textured - White RAL 9016 semi gloss any other RAL colour is available (surcharge + extended lead time)	0 - 45 degrees 0cm - 75cm fall per metre	- 230mm (motorised) - 210mm (manual) less than awning width	66mm Twin Cable pressure die cast joints - upto 5.0m wide = 2	Face Fix 100mm wide - upto 5.0m wide = 2	Class 2 Beaufort 5 Fresh breeze, small trees begin to sway			
- Anthracite Grey RAL 7016 matt textured - White RAL 9016 semi gloss any other RAL colour is available (surcharge + extended lead time)	5 - 38 degrees 10cm - 65cm fall per metre	- 170mm less than awning width	73mm Quad Cable drop forged joints - upto 5.5m wide = 2 - upto 7.0m wide = 3 - upto 11.0m wide = 4 - upto 14.0m wide = 6	Face Fix 300mm wide - upto 3.5m wide = 2 - upto 6.5m wide = 3 - upto 7.0m wide = 4 - upto 14.0m wide = 7	Class 3 Beaufort 6 Strong breeze, large branches in motion			

GUARANTEE

All our patio awnings come with a 5 year parts guarantee, covering the hardware (metalwork inc folding arms), fabric (valance excluded) and mechanism (motors, controls & sensors). Accessories, including lighting, heating & special brackets come with a 12 month parts guarantee. Refer to terms & conditions for full details.

LEAD TIMES

Lead times stated are in working days, from when order is received including all finishing and assortment details including pre-payment if required.

ANGUILLA

Our premium UK manufactured patio awnings feature superstrong alu frameworks, next generation motors & controls and exclusive CBA fabrics that upto 50% less dirt adheres.



PRICES INCLUDE SOMFY IO MOTOR WITH 5M POWER CABLE AND SITUO 5 VAR A/M HANDSET

The best value folding arm awning in the UK

- Casing:**
 - Full cassette
- Fixing Points:**
 - At each end
- Brackets:**
 - Face fix (std) or top fix
- Fabric:**
 - World of Sattler collection
- Hardware:**
 - White RAL 9016 semi gloss
 - Anthracite Grey RAL 7016 matt fine textured
 - Other RAL colours available - price on request
- Operation:**
 - Motorised via integral Somfy IO motor (5m power cable)
 - Manual via gear box & 1.4m detachable crank handle
- Casing Dims:**
 - Face Fix - 152mm high x 223mm deep
 - Top Fix - 154mm high x 229mm deep
- Arms:**
 - Twin cable, twin spring - Upto 4m wide = 2
- Pitch (Angle):**
 - 0 - 45 degrees (0cm - 75cm per metre)
- Fabric Width:**
 - Motorised - 230mm less than awning width
 - Manual - 210mm less than awning width
- Wind Rating:**
 - Class 2 under EN13561 (Beaufort 5 - 24mph, fresh breeze)
- Sensors:**
 - Eolis 3D wirefree wind sensor io - price on request
 - Sunis wirefree II sun sensor io - price on request
- Special Brackets:**
 - Spreader plate - price on request
 - Cantilever bracket - price on request

WIDTH (made to measure)

	2.0m	2.5m	3.0m	3.5m	4.0m
1.5m	£2347 min. width 1.78m	£2529	£2735	£2831	£3328
2.0m	N/A	£2505 min. width 2.30m	£2831	£2940	£3485
2.5m	N/A	N/A	£2940 min. width 2.73m	£3050	£3618

PROJECTION (fixed)

OPTIONS

Valance	ADDITIONAL OPTIONS AVAILABLE Prices to be confirmed on quotation
LED light strip	
Aruba Heater	
Masonry Fixings	
Bracket Covers	

All prices include VAT | For more information please contact sales@londoninteriorblinds.co.uk or call 07595 411700

Anquilla

Motor limits are pre-set, with the handset and any sensors commissioned to the motor and the pitch of the awning pre-set to 14 degrees (25cm fall per metre) - required for rain shower water run off (EN13561). The pitch can be set at a different angle, if required.

- Valance is available upto 30cm high, either straight or loose wave (no guarantee)
- LED lighting strip is mounted on the wall beneath awning (1 year guarantee)
- Aruba heater is mounted on the wall beneath awning (1 year guarantee)
- Any other RAL colour and cantilever brackets increases lead time to 25 days
- FREE delivery

TORTOLA

Our premium UK manufactured patio awnings feature superstrong alu frameworks, next generation motors & controls and exclusive CBA fabrics that upto 50% less dirt adheres.



PRICES INCLUDE SOMFY IO MOTOR WITH 5M POWER CABLE AND SITUO 5 VAR A/M HANDSET

The best value folding arm awning in the UK

- Casing:**
 - Full cassette
- Fixing Points:**
 - At each end
- Brackets:**
 - Face fix (std) or top fix
- Fabric:**
 - World of Sattler collection
- Hardware:**
 - White RAL 9016 semi gloss
 - Anthracite Grey RAL 7016 matt fine textured
 - Other RAL colours available - price on request
- Operation:**
 - Motorised via integral Somfy IO motor (5m power cable)
 - Manual via gear box & 1.4m detachable crank handle
- Casing Dims:**
 - Face Fix - 152mm high x 223mm deep
 - Top Fix - 154mm high x 229mm deep
- Arms:**
 - Twin cable, twin spring - Upto 5m wide = 2
- Pitch (Angle):**
 - 0 - 45 degrees (0cm - 75cm per metre)
- Fabric Width:**
 - Motorised - 230mm less than awning width
 - Manual - 210mm less than awning width
- Wind Rating:**
 - Class 2 under EN13561 (Beaufort 5 - 24mph, fresh breeze)
- Sensors:**
 - Eolis 3D wirefree wind sensor io - price on request
 - Sunis wirefree II sun sensor io - price on request
- Special Brackets:**
 - Spreader plate - price on request
 - Cantilever bracket - price on request

WIDTH (made to measure)

	2.0m	2.5m	3.0m	3.5m	4.0m	4.5m	5.0m
1.5m	£2472 min. width 1.78m	£2650	£2868	£2989	£3509	£3570	£3775
2.0m	N/A	£2735 min. width 2.30m	£2964	£3098	£3642	£3690	£3932
2.5m	N/A	N/A	£3073 min. width 2.73m	£3194	£3775	£3824	£4090
3.0m	N/A	N/A	N/A	£3303 min. width 3.21m	£3908	£3957	£4235

PROJECTION (fixed)

OPTIONS

Valance	ADDITIONAL OPTIONS AVAILABLE Prices to be confirmed on quotation
LED light strip	
Aruba Heater	
Masonry Fixings	
Bracket Covers	

All prices include VAT | For more information please contact sales@londoninteriorblinds.co.uk or call 07595 411700

Tortola

Motor limits are pre-set, with the handset and any sensors commissioned to the motor and the pitch of the awning pre-set to 14 degrees (25cm fall per metre) - required for rain shower water run off (EN13561). The pitch can be set at a different angle, if required.

- Valance is available upto 30cm high, either straight or loose wave (no guarantee)
- LED lighting strip is mounted on the wall beneath awning (1 year guarantee)
- Aruba heater is mounted on the wall beneath awning (1 year guarantee)
- Any other RAL colour and cantilever brackets increases lead time to 25 days
- FREE delivery

CUBA - SINGLE UNIT

Our premium UK manufactured patio awnings feature superstrong alu frameworks, next generation motors & controls and exclusive CBA fabrics that upto 50% less dirt adheres.



The best value folding arm awning in the UK

- Casing:**
 - Full cassette
- Fixing Points:**
 - Multiple, across width of awning
- Brackets:**
 - Face fix (std) or top fix
- Fabric:**
 - World of Sattler collection
- Hardware:**
 - White RAL 9016 semi gloss
 - Anthracite Grey RAL 7016 matt fine textured
 - Other RAL colours available - price on request
- Operation:**
 - Motorised via integral Somfy IO motor (5m power cable)
 - Manual via gear box & 1.4m detachable crank handle
- Casing Dims:**
 - Face Fix - 220mm high x 147mm deep
 - Top Fix - 247mm high x 160mm deep
- Arms:**
 - Quadruple cable, twin spring
 - Upto 5.5m wide = 2
 - 5.51m - 7.0m wide = 3
- Pitch (Angle):**
 - 5 - 38 degrees (10cm - 65cm per metre)
- Fabric Width:**
 - 170mm less than awning width
- Wind Rating:**
 - Class 3 under EN13561 (Beaufort 6 - 30mph, strong breeze)
- Sensors:**
 - Eolis 3D wirefree wind sensor io - price on request
 - Sunis wirefree II sun sensor io - price on request
- Special Brackets:**
 - Spreader plate - price on request
 - Cantilever bracket - price on request

PRICES INCLUDE SOMFY IO MOTOR WITH 5M POWER CABLE AND SITUO 5 VAR A/M HANDSET

WIDTH (made to measure)

	2.5m	3.0m	3.5m	4.0m	4.5m	5.0m	5.5m	6.0m	6.5m	7.0m
1.5m	£3122 min. width 2.05m	£3412	£3570	£4731	£4731	£4840	£4864	£5748	£5881	£5905
2.0m	N/A	£3533 min. width 2.57m	£3691	£4864	£4888	£5022	£5046	£5953	£6086	£6111
2.5m	N/A	£3642 min. width 3.00m	£3799	£4997	£5021	£5178	£5203	£6111	£6292	£6316
3.0m	N/A	N/A	£4211 min. width 3.49m	£5438	£5469	£5651	£5675	£6764	£6970	£6994
3.5m	N/A	N/A	N/A	N/A	£5699 min. width 4.03m	£5953	£5990	£7127 min. width 6.00m	£7333	£7357
3.75	N/A	N/A	N/A	N/A	£6171	£6474	£6498	N/A	£8071	N/A

OPTIONS	ADDITIONAL OPTIONS AVAILABLE Prices to be confirmed on quotation
Valance	
LED light strip	
Aruba Heater	
Masonry Fixings	
Bracket Covers	

All prices include VAT | For more information please contact sales@londoninteriorblinds.co.uk or call 07595 411700

Cuba - single unit

Motor limits are pre-set, with the handset and any sensors commissioned to the motor and the pitch of the awning pre-set to 14 degrees (25cm fall per metre) - required for rain shower water run off (EN13561). The pitch can be set at a different angle, if required.

- Valance is available upto 30cm high, either straight or loose wave (no guarantee)
- LED lighting strip is mounted on the wall beneath awning (1 year guarantee)
- Aruba heater is mounted on the wall beneath awning (1 year guarantee)
- Any other RAL colour and cantilever brackets increases lead time to 25 days
- FREE delivery

CUBA - COUPLED UNIT

Our premium UK manufactured patio awnings feature superstrong alu frameworks, next generation motors & controls and exclusive CBA fabrics that upto 50% less dirt adheres.



The best value folding arm awning in the UK

- Casing:**
 - Full cassette
- Fixing Points:**
 - Multiple, across width of awning
- Brackets:**
 - Face fix (std) or top fix
- Fabric:**
 - World of Sattler collection
- Hardware:**
 - White RAL 9016 semi gloss
 - Anthracite Grey RAL 7016 matt fine textured
 - Other RAL colours available - price on request
- Operation:**
 - Motorised via integral Somfy IO motor (5m power cable)
 - Manual via gear box & 1.4m detachable crank handle
- Casing Dims:**
 - Face Fix - 220mm high x 147mm deep
 - Top Fix - 247mm high x 160mm deep
- Arms:**
 - Quadruple cable, twin spring
 - Upto 11.0m wide = 4
 - 11.01m - 14.0m wide = 6
- Pitch (Angle):**
 - 5 - 38 degrees (10cm - 65cm per metre)
- Fabric Width:**
 - 170mm less than awning width
- Wind Rating:**
 - Class 3 under EN13561 (Beaufort 6 - 30mph, strong breeze)
- Sensors:**
 - Eolis 3D wirefree wind sensor io - price on request
 - Sunis wirefree II sun sensor io - price on request
- Special Brackets:**
 - Spreader plate - price on request
 - Cantilever bracket - price on request

PRICES INCLUDE SOMFY IO MOTOR WITH 5M POWER CABLE AND SITUO 5 VAR A/M HANDSET

	8.0m	9.0m	10.0m	11.0m	12.0m	13.0m	14.0m
1.5m	PRICES TBC on QUOTATION						
2.0m							
2.5m							
3.0m							
3.5m							
3.75							

OPTIONS	ADDITIONAL OPTIONS AVAILABLE Prices to be confirmed on quotation
Valance	
LED light strip	
Aruba Heater	
Masonry Fixings	
Bracket Covers	

All prices include VAT | For more information please contact sales@londoninteriorblinds.co.uk or call 07595 411700

Cuba - coupled unit

Motor limits are pre-set, with the handset and any sensors commissioned to the motor and the pitch of the awning pre-set to 14 degrees (25cm fall per metre) - required for rain shower water run off (EN13561). The pitch can be set at a different angle, if required.

- Valance is available upto 30cm high, either straight or loose wave (no guarantee)
- LED lighting strip is mounted on the wall beneath awning (1 year guarantee)
- Aruba heater is mounted on the wall beneath awning (1 year guarantee)
- Any other RAL colour and cantilever brackets increases lead time to 25 days
- FREE delivery



LONDON INTERIOR BLINDS

SHUTTERS | CURTAINS | AWNINGS

For more information call **07595 411700** or email
sales@londoninteriorblinds.co.uk | londoninteriorblinds.co.uk